

(19) World Intellectual Property  
Organization  
International Bureau



Rec'd PCT/PTO 10 MAY 2005


(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
WO 2004/045988 A1

- (51) International Patent Classification<sup>7</sup>: B65D 90/18, 19/38, 19/42
- (21) International Application Number: PCT/AU2003/001355
- (22) International Filing Date: 14 October 2003 (14.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
2002952755 18 November 2002 (18.11.2002) AU  
2003901994 28 April 2003 (28.04.2003) AU
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant and  
(72) Inventor: BAKER, Maurice [AU/AU]; 14 Forest Lodge Close, Riddels Creek, VIC 3431 (AU).
- (74) Agent: A TATLOCK & ASSOCIATES; 28 Drummond Street, Carlton South, Victoria 3053 (AU).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MOBILE PALLET WITH VARIOUS LOCKING MEANS

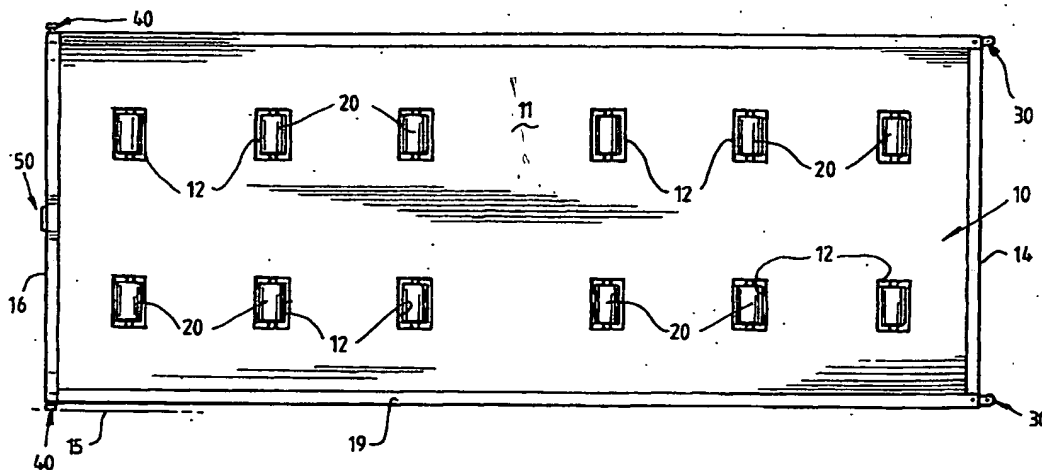

(57) Abstract: A pallet (10) for use within a sea freight container, said pallet having a chassis (19) which is provided with locomotion mean such as wheels or roller (20) enabling it to be rolled into and out of the container, and various locking means to immobilise it within the container. A first locking mechanism (30) is a device pivotally mounted on the leading edge (14) and is able to rotate outwardly from the chassis and engage side walls of the container. A second locking means (40) on trailing edge (14) has a screw member which can be screwed out to engage sidewalls of the container. A third locking member (50) has an extensible member (51) to abut one or more rear doors of the container. These locking means or mechanisms maintain the pallets in a securely fixed location within the shipping containers.